



SOLAR POWERED FLASHING DO NOT ENTER SIGN

- Our Solar Powered LED flashing Do Not Enter Sign is part of a solar traffic safety series
- This sign's bright flashing LED lights and reflective 3M material can be seen from over 2500ft and makes for a great addition for safety pertaining dangerous areas
- Made with an aluminum alloy board and solar board to MUTCD (R5-1) specifications
- Sign has a rechargeable battery and mountable solar panel. This product is energy efficient and easy to use in locations where there is sunlight

PRODUCT APPLICATIONS

Solar Powered Flashing LED Do Not Enter Sign is used to deter drivers from entering one-way streets, interstate highways, access ramps and parking lots. This will help reduce traffic incidents

INCLUDES:

- SIGN
- SOLAR PANEL
- MOUNTING HARDWARE
- INTERNAL BATTERY BACKUP

DOES NOT INCLUDE POLE

PRODUCT SPECIFICATIONS

TYPE: Solar Powered Flashing LED Do Not Enter Sign

PRODUCT CODE: DNE

MUTCD CODE: R5-1

SOLAR CHARGING PANEL: 12V, 5W Monocrystalline Silicone

BATTERY POWER: Lithium Battery 7.4V/4400AH

WORKING TIME: After one full charge, 5-7 consecutive days

WORKING MODE: 12 Hours Per day or 24 hours per day, flashing or constant optional

SIGN COLOR: White and Red

LED COLOR: Red

SHEETING OPTIONS: Engineer Grade or Diamond Grade


DIMENSIONS: 24 inches, 30 inches, or 36 inches

CHARGE TIME: 6-8H

IP: None

BATTERY LIFE SPAN: 3-5 Years

WORKING TEMPERATURE: -20 to 150 °F

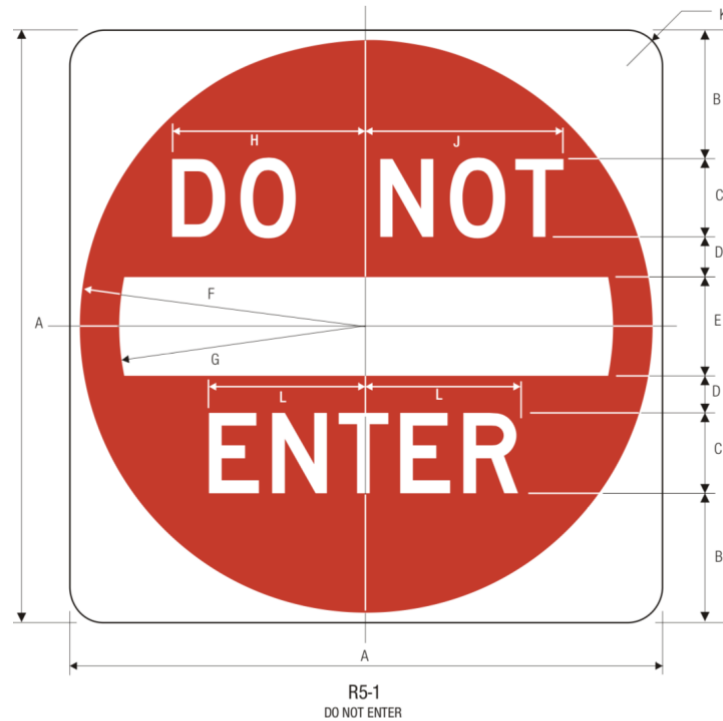

	A	B	C	D	E	F	G	H	J	K	L
C	30	6.5	4 D	2	5	14.5	12.5	9.75	10	1.875	7.875
	36	7.5	5 D	2.5	6	17.5	15	12	12.375	2.25	9.813
	48	11	6 D	3	8	23.5	20	14.5	15	3	11.75

COLORS: SYMBOL — RED (RETROREFLECTIVE)
LEGEND & BACKGROUND — WHITE (RETROREFLECTIVE)

MUTCD GUIDELINES

The DNE adheres to the MUTCD Standards found within MUTCD Guidelines Section 2A.07 for Retroreflective and Illumination

- Illumination of a sign by Light emitting diodes (LEDs)
- Sign Element to be Illuminated: (1) Symbol or word message (2) Portions of the Sign border
- LED's are placed within 1 border unit of border and within words
- LED's are red in color
- LED's are within 1/4" in width
- LED's flashing at a rate of 50 times per minute
- Background of sign is standard 3M reflective engineering grade material